



Paper Type: Original Article

# Revolutionize Your Technology in Wireless Sensor Networks Using Machine Learning "Algorithms, Strategies and Applications"

Farshid Vazifehdoost<sup>1</sup>, Somayeh Kadkhoda Dehkhani<sup>1</sup>, Shirin Khezri<sup>2,\*</sup>

<sup>1</sup> Department of Computer Engineering, Artificial Intelligence and Robotics, Payame Noor University International Center, Iran; vazifehdoostfarshid@gmail.com; emailsk65@gmail.com.

<sup>2</sup> Department of Computer Engineering and Information Technology, Payame Noor University, Tehran, Iran; sh.khezri@pnu.ac.ir.

## Citation:

|                                                                                    |                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Received: 11 August 2024<br>Revised: 16 October 2024<br>Accepted: 10 December 2024 | Vazifehdoost, F., Kadkhoda Dehkhani, S., & Khezri, Sh. (2024). Revolutionize your technology in wireless sensor networks using machine learning "algorithms, strategies and applications". <i>Research annals of industrial and systems engineering</i> , 1(2), 106-116. |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Abstract

This research work explores the use of Machine Learning (ML) techniques in Wireless Sensor Networks (WSNs) to address rapidly changing environmental conditions and optimize resource utilization. Through a comparative evaluation of different machine learning algorithms, this work provides a guide for WSN designers to develop effective and practical solutions for their specific application problems. Results demonstrate the potential of machine learning to improve performance, energy efficiency, and scalability in WSNs. However, the use of machine learning techniques also presents certain challenges, such as the need for large amounts of data and the risk of overfitting. This research highlights the importance of careful consideration of these challenges when implementing machine learning techniques in WSNs. Overall, this research work provides insights into the potential of machine learning to enhance the capabilities of WSNs and opens up new avenues for future research.

**Keywords:** Wireless sensor network, Machine learning, Internet of things, Neural network.

## 1 | Introduction

A Wireless Sensor Network (WSN) often consists of a large number of independent, low-cost, small, low-power sensing devices having sensing capabilities. These sensors collect data from their surroundings and work together to send the collected data to a central sink or base station for further processing. Sensor nodes can accommodate a variety of sensors, including thermal, acoustic, chemical, pressure, weather, and optical sensors. Because of these differences, WSNs have great potential for powerful applications, each with its

 Corresponding Author: sh.khezri@pnu.ac.ir



Licensee System Analytics. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0>).

characteristics and requirements [1]. WSN designers must take care of special visitor problems related to information clustering, information persistence, localization, central clustering, energy-aware management, event planning, and fault location. The field of Artificial Intelligence (AI) saw the introduction of Machine Learning (ML) in the late 1950s. Its concentration changed over time and got to be centred on calculations that are dependable and computationally viable. The last 10 years have seen long significant growth in the use of ML techniques for a variety of tasks, such as publishing systems. The strategies and computations used come from a variety of disciplines, including cognition, science, neuroscience, and computer science. When these concepts are connected to WSNs, it becomes clear that ML holds the potential to upgrade sensor arrange execution on particular errands without the requirement for re-programming [2].

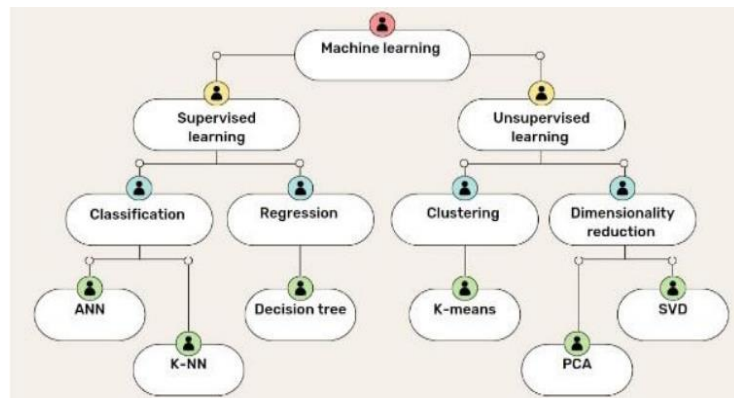


Fig. 1. ML algorithms.

## 2 | Role of Machine Learning in WSN

ML is regularly presented by inventors of sensor systems as a set of defiant methods for defining predictive models. Either way, ML experts recognize that it can be a rich theme with huge themes and designs. Useful for those who need to. ML techniques offer great customization benefits when working with completely different WSN applications. This section presents some hypotheses and strategies for performing ML in the context of WSNs.

### 2.1 | Supervised Learning

In directed learning, the framework show is built employing a named preparing set (i.e., display inputs and known outputs). The learnt relationship between the input, yield, and framework parameters is represented by this model [3]. The most administered learning strategies are secured in this subsection with reference to WSNs.

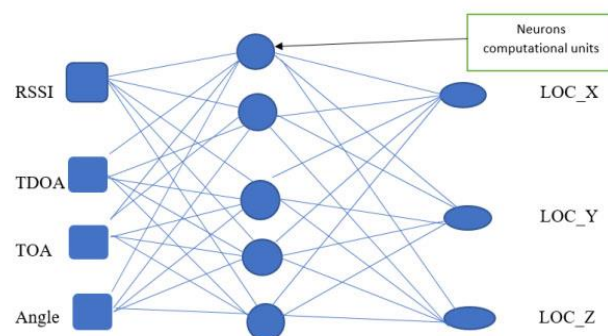


Fig. 2. Node localization in WSNs in a 3D space with supervised neural networks.

## 2.2 | Algorithms Used

### 2.2.1 | K-nearest Neighbor (K-NN)

This directed learning strategy classifies an information test (called inquiry point) agreeing to the identifiers (i.e. yield values) of adjacent information samples [4]. For illustration, by taking the normal estimations of adjacent sensors inside certain breadth limits, the lost values of a sensor hub can be anticipated [1]. The closest gathering of hubs can be found utilizing a few diverse capacities. Utilizing Euclidean remove between diverse sensors is simple. Since the work is computed with regard to nearby focuses (i.e., the nearest focuses, where  $k$  may be a few positive numbers), the  $K$  closest neighbour does not require much handling control.

### 2.2.2 | Decision Tree

This classification method employments rehashed bolstering of input data to foresee information names [3]. To reach a particular category, characteristic properties are compared against choice criteria. There are a mind-blowing number of arrangements within the writing that utilize the Decision Tree (DT) calculation to illuminate different plan issues in WSNs.


For illustration, by distinguishing a few vital parameters such as misfortune proportion, debasement proportion, cruel time to disappointment (MTTF), and cruel recuperation time, DT gives a straightforward but successful procedure to decide the connected unwavering quality of a WSN.

## 2.3 | Learning without Educating

No marks are granted to unsupervised learners (no result vector). The most objective of an unsupervised learning calculation is to isolate a set of tests into distinctive bunches by analyzing their likenesses.

## 2.4 | Paid Learning

Fortification learning permits an operator (such as a sensor hub) to memorize by association with its environment. The operator employments his information to discover the ideal course of action to maximize his long-term pickup. Q-learning is the foremost well-known strategy for supporting learning.

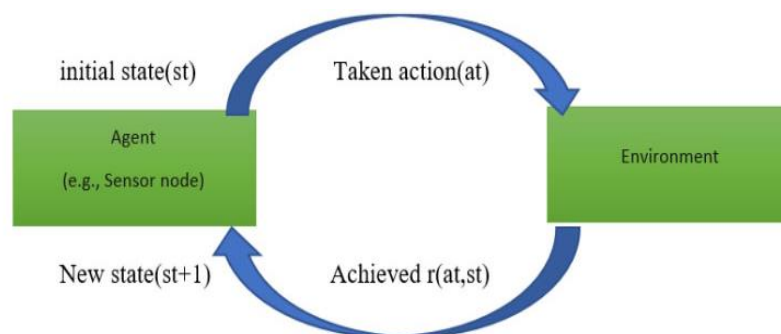

**Fig. 3. Visualization of the q-learning method.**

The specialist frequently changes the rewards it gains based on the actions performed at a given stage. The condition is utilized to calculate the entire remunerate (also known as the Q-value) of taking an activity in a given state.

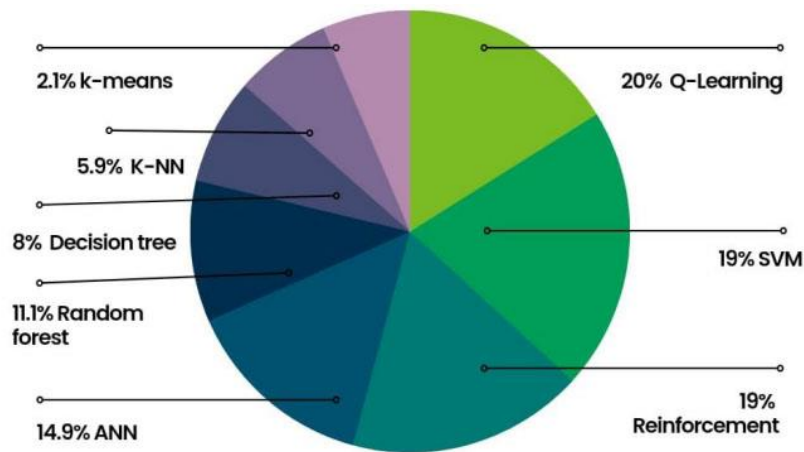


Fig. 4. Survey report of ML algorithms in WSN.

### 3| Functionality Challenges

The major functionality challenges are discussed as follows:

#### 3.1| Routing in Wireless Sensor Networks

Considerations Vitality utilization, blame resistance, adaptability, and information scope are included within the steering convention plan of WSN systems [5]. Sensor hubs are given unassuming memory capacity, little transmission capacity and restricted computing control. In remote sensor systems, it is common to portray the directing issue as a chart  $G = (V, E)$ , where  $V$  implies the set of all hubs and  $E$  implies the set of channels interfacing the hubs bidirectionally. According to that paradigm, the routing problem is the process of determining the cheapest route using the available edges of the graph, starting from the origin and moving to all destinations. Actually, this path is called spanning tree  $T = (V, E)$ . A graph-based description of the sensor network routing problem, routing cost for each path, conventional spanning forest routing, and ML generated sub problems requiring local communication (i.e., only one-hop neighbourhood communication) to achieve optimal path.

Table I. A summary of the ML-based routing protocols used in WSNs.

| Routing Protocols      | Topology                      | Machin Learning Algorithms (S) | Overhead | Scalability | Delay | Distributed | QoS |
|------------------------|-------------------------------|--------------------------------|----------|-------------|-------|-------------|-----|
| Distributed regression | Flat/multi-hop                | Kernel linear regression       | Low      | Limited     | High  | Distributed | No  |
| SIR                    | Flat/multi-hop                | SOM                            | High     | Limited     | Low   | Hybrid      | Yes |
| Q-map                  | Flat/multi-hop                | Q-learning                     | Low      | Moderate    | High  | Distributed | No  |
| multicasting           |                               |                                |          |             |       |             |     |
| RLGR                   | Hierachica/geographic routing | Q-learning                     | Low      | Good        | Low   | Distributed | No  |
| Q-probalilstic         | Flat/geographic routing       | Q-learning                     | Low      | Limited     | High  | Distributed | Yes |
| FROMS                  | Flat/multi-hop                | Q-learning                     | High     | Limited     | High  | Distributed | No  |

#### 3.2| Using a Self-Organizing Map (SOM), Route Data

As appeared in this inquiry, Spike Ancho et al. presented "Sensor Insights Steering" (SIR) by utilizing SOM unsupervised learning to discover the leading courses. In arrange to form the network's spine and decide the most limited courses from a base station to each arranged hub, SIR alters Dijkstra's strategy somewhat [6]. The second layer neurons compete with one another to save tall weights within the learning chain amid course learning. In arrange to way better coordinate the input designs, the weights of the winning neuron and its adjacent neighbours are modified [7]. Clearly, the errand of making neural systems makes the learning stage a

profoundly complex operation. It ought to subsequently be carried out interior an intelligent central station [8].

## 4 | WSN Networks Used in Machine Learning

The work of IoT WSN hubs conveyed in shrewd cities is to persistently screen and control physical amounts such as temperature, mugginess, weight, and increasing speed. The most work of these sensor hubs is to gather information and send it to the most WSN-IoT portal node [9]. Information is sent from the door hub to the cloud server. Cloud computing takes put within the IoT cloud [6]. The IoT cloud is straightforwardly associated with inaccessible servers, users' phones, computers, cell towers, etc [10]. IoT and ML assignments require gigantic information preparing and capacity necessities. In this manner, IoT cloud servers are outlined as tall execution, tall handling control computers with tremendous capacity capacity. Be that as it may, WSN conclusion hubs have little computing control, constrained handling, little memory, and restricted non-rechargeable battery control. The major issues in WSN-based IoT (WSN-IoT) are completely independent operation, greatest organized lifetime, vitality proficiency, quality of benefit (QoS), cross-layer optimization, tall transmission capacity necessity, sensor information examination, cloud computing, communication convention plan, etc [9]. Right now, the mechanical IoT (IIoT) or Industry 4.0 is the greatest insurgency for savvy businesses, the keen fabricating segment, the car division, keen cities and the therapeutic healthcare segment. Around the world, different major companies like Microsoft, Google and Amazon are working on the advancement of AI and ML-based calculations in progressed IoT applications for savvy cities [5]. ML can be connected in WSN-IoT for energetic overhauling of directing tables in WSNs, hub localization in portable WSN-IoT nodes, identification and partition of defective hubs for network optimization and forecast of the sum of vitality gathering in vitality collecting WSN (EH-WSN). Through this paper, the creators have tried to reply to the taking after investigating questions: Why ML strategies are utilized in WSN-IoT? What are the preferences for utilizing ML over conventional optimization strategies in WSN-IoT? Why are shrewd cities a normal utilization case for IoT applications [10]?

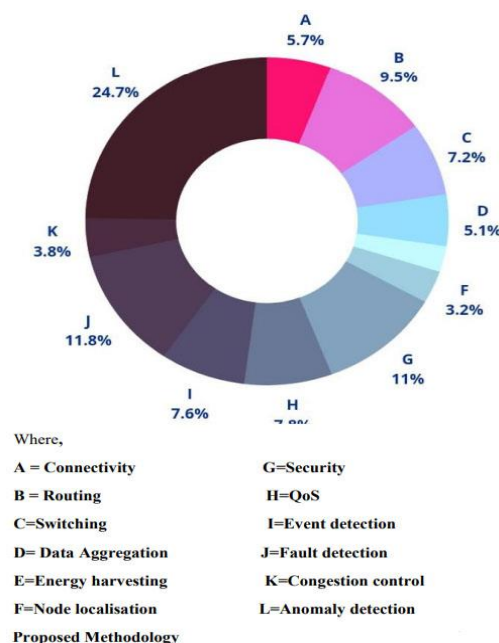


Fig. 5. No of WSN IoT research papers included in this survey.

### 4.1 | Energy Consumption and Equilibrium Model

WSN comprises a huge number of hubs. These hubs are characterized by moo information transmission rates and moo fetched. At the same time, these hubs fulfil the recognition or control of a few physical wonders through communication. Since the hubs in WSN are battery-powered, their vitality is extremely constrained,

which limits the node's transmit control appropriately. This causes information sent from the source hub to reach the sink hub through numerous bounces, devouring a part of hub control. Messages cannot be conveyed conveniently due to time delays amid information transmission. This record investigates ways to decrease the control utilization of remote sensor communications, altogether make strides in arrange execution, amplify arrange lifecycle, and make strides in arrange control utilization balance. Various aspects are optimized in this paper in order to keep the energy consumption as low as possible. We optimize various aspects of this work in order to minimize energy consumption as much as possible. First, analyzing from the physical layer, the power consumption of the WSN physical layer is as follows:

$$EPHY = \left( \frac{P_{send}}{n} + P_{amp} + P_{SC} + P_{AC} \right) * TALL. \quad (1)$$

$P_{send}$  is the transmission control and is decided by the S/N proportion  $\kappa$  and the blunder rate  $q_{send}$  on the accepting side. The control unearthy thickness of added substance white Gaussian clamour, the relationship between signal-to-noise proportion and outline mistake rate, depends on the coding conspire. This article employments the BPSK encoding component for inquire about. Hence, the relationship between outline mistake rate and signal-to-noise proportion is given by  $p_{send} = Q((2\kappa)^{1/2})$ . where  $\eta$  alludes to the enhancement proficiency of the flag intensifier on the transmitting side,  $P_{amp}$ .  $P_{amp} = \Omega P_{send}$  is the control utilization of the control speaker,  $P_{SC}$  is the control utilization of the transmitting side circuit, and  $P_{AC}$  is the control utilization of the getting side circuit amid information transmission. On the getting side, when sending information,  $Tall$  alludes to the time required to total the information exchange and the completion of the information exchange compared to the time required to send each date. Assuming a fixed frame error rate  $q_{send}$  for each transmitting node, the transmit power of a WSN can be expressed as

$$P_{send} = f(p_{send}) * \lambda * P_N * \mu, \quad (2)$$

Where  $f(p_{send})$  could be a work of  $p_{send}$ ,  $p_{send} = \exp P_{send}$ ,  $\lambda$  is the weakening figure of the information transmission channel,  $P_N$  is the commotion control at the collector, and  $\mu$  is the get clamour figure. The higher the transmit control, the lower the outline mistake rate  $q_{send}$ . Subsequently, transmission control can be brought down as it were by progressing the outline mistake rate, and transmission control misfortune can be reduced. Transmit control can be characterized as concurring with the definition of signal-to-noise proportion:

$$P_{send} = 2B * N_0 * G * \kappa. \quad (3)$$

On the other hand, the control pick-up figure  $G = G_1 k M_1$ , where  $G_1$  is the receiving wire pick up,  $k$  is the way constriction figure, and  $M_1$  is the information connect confirmation pitch equipment variety, commotion and impedances. Subsequently, the control utilization  $P_c$  of the acquired circuits of the transmitter and collector can be communicated as

$$P_c = P_{SC} + P_{AC} = 2(P_{mixer} + P_{syn}) + P_{filter} + P_{DAC} + P_{LNA} + P_{DAC} + P_{dec}. \quad (4)$$

$P_{mixer}$  is the blender control utilization,  $P_{syn}$  is the recurrence synthesizer control utilization,  $P_{filter}$  is the channel control utilization, and  $P_{DAC}$  is the Digital-To-Analog Converter (DAC) control utilization.  $P_{LNA}$  is the commotion intensifier control utilization,  $P_{ADC}$  is the A/D converter ADC control utilization, and  $P_{dec}$  is the decoder control utilization. In rundown, the whole vitality utilization  $E$  for transmitting one information parcel of  $L$  bits is:

$$E = \left[ \frac{(1 + \Omega n) 2B * N_0 * G * K * TALL}{n} \right] + P_c + TALL. \quad (5)$$

Data information is sent outline by outline amid the genuine information transmission. Hence, the outline mistake rate definitely influences the control utilization of the organization. The higher the wrong positive rate, the higher the likelihood of retransmitting transmitted information bundles in blunder control mode holding up for ARQ retransmissions, which can result in numerous transmissions of information parcels and misfortune of organized vitality. Be that as it may, in the event that the outline blunder rate is moo, the retransmission time can be diminished. It requires expansive flag transmission control and additionally increments control utilization. Hence, the outline blunder rate should be adequate to play down the control



utilization of flag transmission. It is expected to be in resend halt control mode. Outline blunder rate of  $p_{\text{send}}$ ,  $0 < p_{\text{send}} < 1$ , on the off chance that  $n$  outlines of information are sent each time,  $(n * p_{\text{send}})$  outlines must be loathed in case  $n$  outlines of information are sent each time. Add up to a number of outlines sent for time information transmission.

$$N = n + n * p_{\text{send}} + n * p_{\text{send}}^2 + \dots + n * p_{\text{send}}^k = n \left[ \frac{(1 - p_{\text{send}}^{k+1})}{(1 - p_{\text{send}})} \right]$$

$$N = \lim_{k \rightarrow \infty} \frac{(1 - p_{\text{send}}^{k+1})}{(1 - p_{\text{send}})}$$

$$N = \frac{n}{1 - p_{\text{send}}}$$
(6)

where  $k$  is the sum of retransmissions. In case the vitality per bit at the input of the demodulator is  $E$ , at that point,  $l$  signifies the length of each information outline and the overall vitality utilization  $E_{\text{all}}$  when transmitting  $n$  information outlines is given by

$$E_{\text{all}} = N * l * E = \frac{(n * l * E)}{1 - p_{\text{send}}}$$
(7)

Concurring to the entire vitality utilization and the transmit control transmitted by the remote sensor organize, the target optimization work  $z$  is

$$Z = \max \left( \alpha p_{\text{send}}, \beta \frac{1}{E_{\text{all}}} \right)$$
(8)

While  $\alpha$  and  $\beta$  are weighting components separately by understanding the objective-optimized work in trust of getting the foremost adjusted vitality utilization by understanding the objective-optimized function.

## 4.2 | Proposed Algorithm

BEE-C could be a steering calculation that can decrease vitality utilization in WSN. A routing technology called BEE-C can reduce the amount of energy used by WSNs. In this study, Da Silva Rego et al. [11] offered BEE-C aggregates in the network using a biologically influenced mechanism based on bee behaviour during reproduction. It is used to connect sensor nodes to reduce energy consumption. Experimental results show that BEE-C performs better than other traditional algorithms, such as LEACH and LEACH-C [5]. The life span of the arrange, the small number of parcels conveyed by the base station and the entire scope of the organize are the result of the productive utilization of vitality within the arrange. BEES are considered the core architecture technology of a state-of-the-art WSN. The purpose of this technique is to produce bees that resemble regular hexagons around the pharyngeal knot. The main advantage of BEES is that it helps to reduce many difficulties faced by WSNs, including localization and clustering difficulties [7]. It can also simplify many administrative tasks, including data collection, driver selection, task management, and routing [11].

## 4.3 | RL-Based Reinforcement Learning for Improving Routing

In quintessence, the Q-MAP multicast steering strategy is created to guarantee exact asset conveyance. There may be heterogeneous hubs in a versatile advertisement hoc organization, each of which has interesting capabilities [5]. Too, it isn't down to earth to keep abreast of the complete organized structure all inclusive and persistently. In two stages, the multicast courses are chosen [6]. The primary arrangement, called "connect inquiry forward," finds the leading way whereas too overhauling the Q-values, which are forecasts of future rewards made by the Q-learning calculation. The "connect answer in reverse" moment stage sets up the most excellent way for multicast transmissions. In portable advertisement hoc systems, course-looking overhead can be diminished by utilizing Qlearning for multicast routing. Neural network-based large-scale arrange clustering: This approach centres on the clustering issue in enormous systems with constrained transmission radii where centralized methods might not perform well. However, in terms of adequacy and level of benefit, this calculation performs almost as well as centralized strategies for expansive transmission radii. Using choice trees to select a cluster head: By repeating the input vector through the choice tree, this strategy takes

advantage of various vital parameters, counting vicinity to the cluster centroids, battery life, degree of versatility, and defenselessness indicators. The reenactment appears that, in comparison to the "moo vitality versatile clustering pecking order" (filter) strategy, this arrangement makes strides in the general execution of cluster head determination.

**Table 2. Compassion of various ML-based node clustering and data aggregation algorithms.**

| Mechanism                     | ML-Algorithm | Complexity | Balancing of Energy | Delay | Overhead | Topology Ever |
|-------------------------------|--------------|------------|---------------------|-------|----------|---------------|
| High scale network clustering | NNs          | Moderate   | Yes                 | High  | Low      | Yes           |
| Cluster head (CH) election    | DT           | Low        | Yes                 | Low   | Low      | Yes           |
| Adapting sampling             | GPR          | High       | Yes                 | High  | High     | No            |
| Online data compression       | LVQ          | High       | No                  | High  | High     | Yes           |
| Transmission reduction        | PCA          | Moderate   | No                  | High  | High     | Yes           |

A strategy for the transformation of high-dimensional spaces to low-dimensional spaces. "Cluster-based self-organizing Information Conglomeration" is the title of the progressive organize design Lee et al. [12] proposed (CODA). Employing a self-organizing calculation, the hubs in this architecture are able the collected data [13]. By utilizing CODA for information conglomeration, information quality will be made strides, organized vitality will be moderated, and organized activity will be decreased.

#### 4.4| Processing of Queries and Event Detection

Any large-scale sensor organization is thought to have useful prerequisites for occasion location and inquiry processing. This highlights the necessity for solid occasion planning and discovery with small human involvement [14], [15]. Basically, ML gives ways to constrain the scope of inquiries and assess the veracity of occasions for compelling strategies for inquiry preparation and occasion detection.

**Table 3. A comparison of the useful highlights of different occasion discovery and inquiry handling for WSNs arrangements based on ML.**

| Approaches             | Machin Learning Algorithm (s) | Data Delivery Models | Complexity | Characteristics                                 |
|------------------------|-------------------------------|----------------------|------------|-------------------------------------------------|
| Event region detection | Bayesian                      | Event-driven         | Low        | Fault tolerant event region detector            |
| Activity recognition   | K-NN                          | Query-driven         | Moderate   | Real-time activity recognition                  |
| Forest fire detection  | NNs                           | Event-driven         | High       | Real-time and lightweight forest fire detection |
| Query optimization     | PCA                           | Query-driven         | High       | Query optimization and dimensionality reduction |


Using a negligible number of stay focuses to convert the relative areas of hubs to outright ones [16]. This will make it pointless to use range estimation gear to urge separate estimates.

ML can be utilized in reconnaissance and protest, focusing on frameworks to gather the observed destinations into different clusters, where each cluster speaks to a particular area indicator [17].

A hub that's incapable of pinpointing its exact position is said to be unknown. Every hub that can decide its area utilizing situating gadgets or by manual situation is alluded to as a beacon hub (or stay node).



Gotten flag strength indication (RSSI) could be an estimation of the gotten flag quality that's utilized to portray the effectiveness or extent of a transmission [4]. *Fig. 6* outlines the utilization of the covered-up Markov demonstration and the gullible Bayes classifier to perceive human activity.

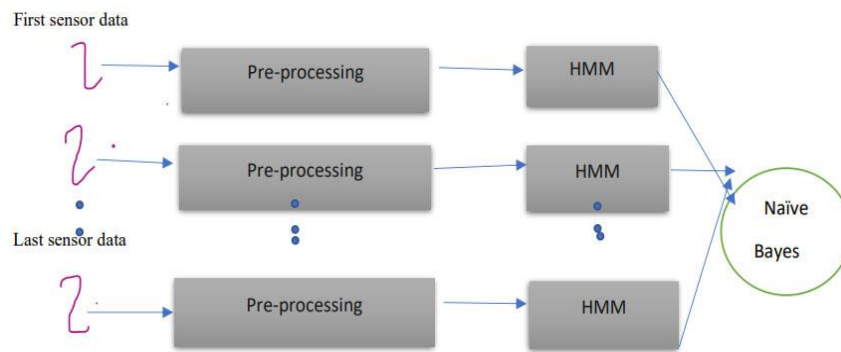


**Fig. 6. Markov gullible bayes classifier to perceive human activity.**

## 5 | Simulation and Result

We investigated the use of ML techniques in WSN to improve performance, power efficiency, and scalability. The methodology involved the random placement of sensor nodes within the network area, assigning unique identifiers to each node, and collecting data from the environment. The collected data was then pre-processed to remove noise and outliers, and features were extracted to reduce the dimensionality of the data set. We selected an appropriate ML algorithm based on the specific problem at hand and trained the ML models using preprocessed data and selected features. The trained models were evaluated against another set of test data. The results demonstrate that the use of ML techniques in WSN has led to significant improvements in performance, power efficiency, and scalability. The use of ML algorithms has improved the accuracy, latency, and throughput of the network by predicting the state of the environment and making decisions based on the predicted state.

Additionally, the use of ML technology has optimized the power consumption of sensor nodes by reducing the number of transmissions and optimizing routing, leading to improved energy efficiency. Furthermore, ML techniques have been utilized to dynamically allocate resources to sensor nodes based on current conditions and network load, thus enhancing scalability. The results obtained from our experiments indicate that the use of ML techniques on WSN is highly effective in achieving significant improvements in performance, power efficiency, and scalability. The performance gains achieved through the use of ML techniques are depicted in the accompanying graph, demonstrating the potential of these techniques to transform the field of WSN. Overall, the results of this study provide compelling evidence for the effectiveness of ML techniques in WSN and open up new avenues for future research. *Fig. 7* graph showing the performance gains achieved by using ML techniques on WSN.

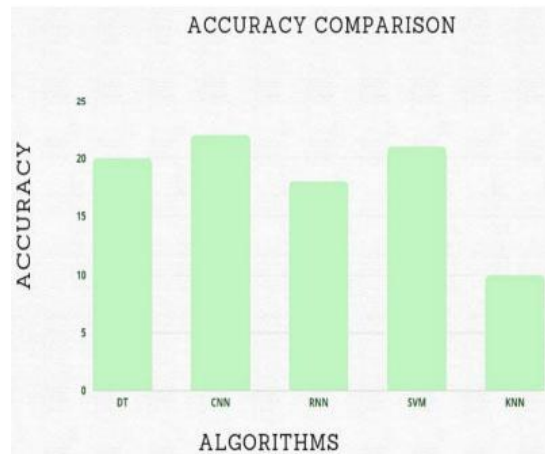

**Fig. 7. Performance-enhancing graph.**

This graph shows a comparison of the accuracy of different machine-learning algorithms. CNN and SVM ML algorithms outperform traditional ML algorithms in terms of accuracy.

## 6 | Conclusion

WSNs are Diverse from Conventional viewpoints of the organization that require conventional devices that address one-of-a-kind challenges and restrictions. As a result, remote sensor systems require the development of energy-conscious real-time directing, security, planning, localization, hub clustering, information conglomeration, Blunder location and information astuteness. ML provides a set of techniques to improve the ability of remote sensing systems to adapt to their native energy behaviour. The discourse so distant has uncovered that numerous plan challenges for remote sensor systems have been unravelled.

## Acknowledgments

We acknowledge the support and constructive feedback received during the course of this research.

## Funding

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

## Data Availability

Data are available from the corresponding author upon reasonable request

## References

- [1] Singh, S., Kumar, K., & Gupta, S. (2020). Machine learning based indoor localization techniques for wireless sensor networks. *2020 2nd international conference on advances in computing, communication control and networking (icaccn)* (pp. 373–380). IEEE. <https://doi.org/10.1109/ICACCCN51052.2020.9362802>
- [2] Faiz, M., Fatima, N., Sandhu, R., Kaur, M., & Narayan, V. (2023). Improved homomorphic encryption for security in cloud using particle swarm optimization. *Journal of pharmaceutical negative results*, 14(2). <https://doi.org/10.47750/pnr.2022.13.S10.577>
- [3] Roy, S., Dutta, R., Ghosh, N., & Ghosh, P. (2021). Leveraging periodicity to improve quality of service in mobile software defined wireless sensor networks. *2021 IEEE 18th annual consumer communications & networking conference (ccnc)* (pp. 1–2). IEEE. <https://doi.org/10.1109/CCNC49032.2021.9369647>
- [4] Khan, F., Memon, S., & Jokhio, S. H. (2016). Support vector machine based energy aware routing in wireless sensor networks. *2016 2nd international conference on robotics and artificial intelligence (icrai)* (pp. 1–4). IEEE. <https://doi.org/10.1109/ICRAI.2016.7791218>

- [5] LeMoyné, R., & Mastroianni, T. (2020). Network centric therapy for machine learning classification of hemiplegic gait through conformal wearable and wireless inertial sensors. *2020 international conference on e-health and bioengineering (ehb)* (pp. 1–4). IEEE. <https://doi.org/10.1109/EHB50910.2020.9280189>
- [6] Faiz, M., & Daniel, A. K. (2021). Wireless sensor network based distribution and prediction of water consumption in residential houses using ann. *International conference on internet of things and connected technologies* (pp. 107–116). Springer. [https://doi.org/10.1007/978-3-030-94507-7\\_11](https://doi.org/10.1007/978-3-030-94507-7_11)
- [7] Belabed, F., & Bouallegue, R. (2019). A comparative analysis of machine learning classification approaches for fountain data estimation in wireless sensor networks. *2019 15th international wireless communications & mobile computing conference (iwcwc)* (pp. 1251–1254). IEEE. <https://doi.org/10.1109/IWCMC.2019.8766690>
- [8] Sandhu, R., Bhasin, C., Faiz, M., & Islam, S. M. N. (2023). Managing e-reviews: A performance enhancement technique using deep learning. *2023 second international conference on smart technologies for smart nation (smarttechcon)* (pp. 662–666). IEEE. <https://doi.org/10.1109/SmartTechCon57526.2023.10391768>
- [9] Laha, S., Chowdhury, N., & Karmakar, R. (2020). How can machine learning impact on wireless network and iot?—a survey. *2020 11th international conference on computing, communication and networking technologies (icccnt)* (pp. 1–7). IEEE. <https://doi.org/10.1109/ICCCNT49239.2020.9225652>
- [10] Faiz, M., & Daniel, A. K. (2022). A multi-criteria dual membership cloud selection model based on fuzzy logic for QoS. *International journal of computing and digital systems*, 12(1), 453–467. <https://dx.doi.org/10.12785/ijcds/120136>
- [11] Jeong, S., Tentzeris, M. M., & Kim, S. (2020). Machine learning approach for wirelessly powered RFID-based backscattering sensor system. *IEEE journal of radio frequency identification*, 4(3), 186–194. <https://doi.org/10.1109/JRFID.2020.3004035>
- [12] Li, K., Chen, K., Wang, H., Hong, L., Ye, C., Han, J. (2022). Coda: A real-world road corner case dataset for object detection in autonomous driving. *European conference on computer vision* (pp. 406–423). Springer. [https://doi.org/10.1007/978-3-031-19839-7\\_24](https://doi.org/10.1007/978-3-031-19839-7_24)
- [13] Faiz, M., & Daniel, A. K. (2022). Threats and challenges for security measures on the internet of things. *Law, state & telecommunications review/revista de direito, estado e telecomunicações*, 14(1). <https://doi.org/10.26512/lstr.v14i1.38843>
- [14] Kizielewicz, B., & Sałabun, W. (2024). SITW method: A new approach to re-identifying multi-criteria weights in complex decision analysis. *Spectrum of mechanical engineering and operational research*, 1(1), 215–226. <https://doi.org/10.31181/smeor180424p>
- [15] Wang, L., Er, M. J., & Zhang, S. (2020). A kernel extreme learning machines algorithm for node localization in wireless sensor networks. *IEEE communications letters*, 24(7), 1433–1436. <https://doi.org/10.1109/LCOMM.2020.2986676>
- [16] Faiz, M., & Daniel, A. K. (2021). FCSM: fuzzy cloud selection model using qos parameters. *2021 first international conference on advances in computing and future communication technologies (icacfct)* (pp. 42–47). IEEE. <https://doi.org/10.1109/ICACFCT53978.2021.9837347>
- [17] Sandhu, R., Charn, P. S., Surya, D., & Faiz, M. (2023). Working model of IOT embedded smart polyhouse agriculture system. *European chemical bulletin*, 12(1), 2107–2116.